

ALUMINIUM ELECTROLYTIC CAPACITOR


SR Series

FEATURES

- ◆ Load life of 2000 hours at 85°C
- ◆ Standard series for general purpose
- ◆ Applications for TV, video, audio, office and home appliances, etc.
- ◆ High value of CV range



OUTLINE

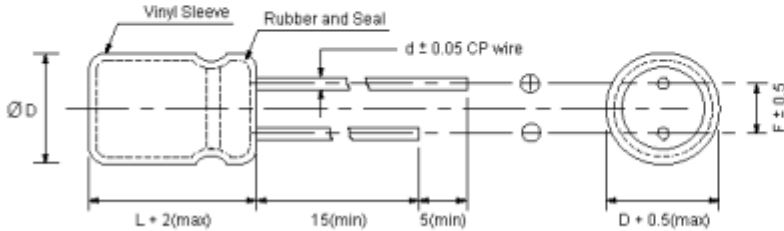

	mm									
D	5	6.3	8	10	13	16	18	20	22	25
F	2.0	2.5	3.5	5.0	7.5	10.5	12.5			
d	0.5	0.6			0.8			1		

SPECIFICATIONS

Items	Characteristics															
Capacitance Tolerance (120Hz, 25°C)	± 20% (M)															
Rated Working Voltage Range	6.3 ~ 100Vdc							160 ~ 450Vdc								
Operation Temperature	-40°C ~ +85°C							-25°C ~ +85°C								
Leakage Current (25°C)	(After 2 minutes applying the DC working voltage)							(After 5 minutes applying the DC working voltage)								
	$I \leq 0.01CV$ or 3 (μA)							$I \leq 0.03CV + 10$ (μA)								
	◆ I : Leakage Current (μA)			◆ C : Rated Capacitance (μF)						◆ V : Working Voltage (V)						
Surge Voltage (25°C)	W.V.	6.3	10	16	25	35	40	50	63	100	160	200	250	350	400	450
	S.V.	8	13	20	32	44	50	63	79	125	200	250	300	400	450	500
Dissipation Factor (120Hz, 25°C)	W.V.	6.3	10	16	25	35	40	50	63	100	160	200	250	350	400	450
	$\tan \delta$	0.25	0.20	0.17	0.15	0.12	0.12	0.10	0.10	0.10	0.15	0.15	0.15	0.20	0.20	0.20
	◆ For capacitance exceeding 1000 μF , add 0.02 per increment of 1000 μF															
Temperature Characteristics	W.V.	6.3	10	16	25	35	40	50	63	100	160	200	250	350	400	450
	- 25°C / + 25°C	4	4	3	3	2	2	2	2	2	3	3	3	6	6	6
	- 40°C / + 25°C	10	8	6	4	3	3	3	3	3	4	4	4	6	6	6
	◆ Impedance ratio at 120Hz															
Load Test	After 2000 hours application of WV at +85°C, the capacitor shall meet the following limits:															
	Capacitance Change	$\leq \pm 20\%$ of initial value														
	$\tan \delta$	$\leq 150\%$ of initial specified value														
	Leakage Current	\leq initial specified value														
Shelf Test	After 1000 hours, no voltage applied at +85°C, the capacitor shall meet the following limits:															
	Capacitance Change	$\leq \pm 20\%$ of initial value														
	$\tan \delta$	$\leq 150\%$ of initial specified value														
	Leakage Current	$\leq 200\%$ of initial specified value														

