

Fast Switching Plastic Rectifier


DO-204AL (DO-41)

FEATURES

- Fast switching for high efficiency
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- Solder dip 275 °C max. 10 s, per JESD 22-B106
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

TYPICAL APPLICATIONS

For use in fast switching rectification of power supply, inverters, converters and freewheeling diodes for consumer and telecommunication.

Note

- These devices are not AEC-Q101 qualified.

MECHANICAL DATA

Case: DO-204AL, molded epoxy body

Molding compound meets UL 94 V-0 flammability rating
Base P/N-E3 - RoHS-compliant, commercial grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

E3 suffix meets JESD 201 class 1A whisker test

Polarity: Color band denotes cathode end

PRIMARY CHARACTERISTICS	
I _{F(AV)}	1.0 A
V _{RRM}	50 V, 100 V, 200 V, 400 V, 600 V
I _{FSM}	30 A
t _{rr}	200 ns
I _R	5.0 µA
V _F	1.2 V
T _J max.	150 °C
Package	DO-204AL (DO-41)
Diode variation	Single die

MAXIMUM RATINGS (T _A = 25 °C unless otherwise noted)							
PARAMETER	SYMBOL	1N4933	1N4934	1N4935	1N4936	1N4937	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	145	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	V
Maximum average forward rectified current 0.375" (9.5 mm) lead length at T _A = 75 °C	I _{F(AV)}	1.0					A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	30					A
Maximum reverse recovery current	I _{RM}	2.0					A
Operating junction and storage temperature range	T _J , T _{STG}	- 50 to + 150					°C

ELECTRICAL CHARACTERISTICS (T _A = 25 °C unless otherwise noted)									
PARAMETER	TEST CONDITIONS	SYMBOL	1N4933	1N4934	1N4935	1N4936	1N4937	UNIT	
Maximum instantaneous forward voltage	1.0 A	V _F	1.2					V	
Maximum DC reverse current at rated DC blocking voltage		T _A = 25 °C	I _R	5.0				µA	
Maximum reverse recovery time		T _A = 100 °C		100					
Typical junction capacitance	I _F = 1.0 A, V _R = 30 V, dI/dt = 50 A/µs, I _{rr} = 10 % I _{RM}	C _J	200					ns	
Maximum reverse recovery time	4.0 V, 1 MHz	t _{rr}	12					pF	

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	1N4933	1N4934	1N4935	1N4936	1N4937	UNIT
Typical thermal resistance	$R_{\theta,JA}^{(1)}$			55			$^\circ\text{C}/\text{W}$
	$R_{\theta,JL}^{(1)}$			25			

Note

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5 mm) lead length, P.C.B. mounted

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
1N4933-E3/54	0.33	54	5500	13" diameter paper tape and reel
1N4933-E3/73	0.33	73	3000	Ammo pack packaging

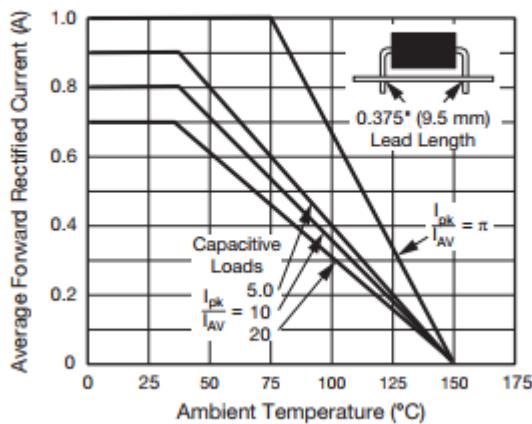
RATINGS AND CHARACTERISTICS CURVES ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Fig. 1 - Forward Current Derating Curves

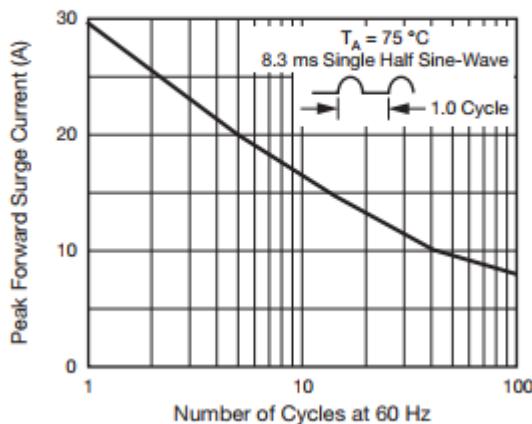


Fig. 3 - Maximum Non-repetitive Peak Forward Surge Current

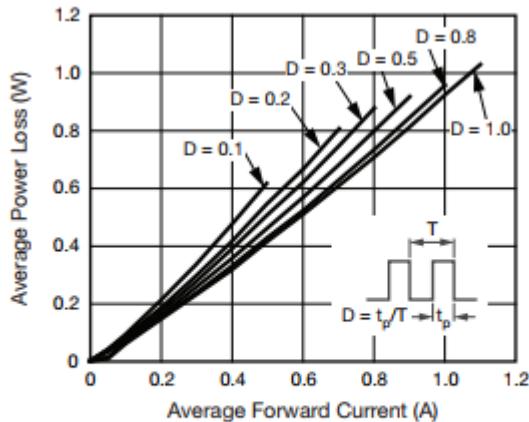


Fig. 2 - Forward Power Loss Characteristics

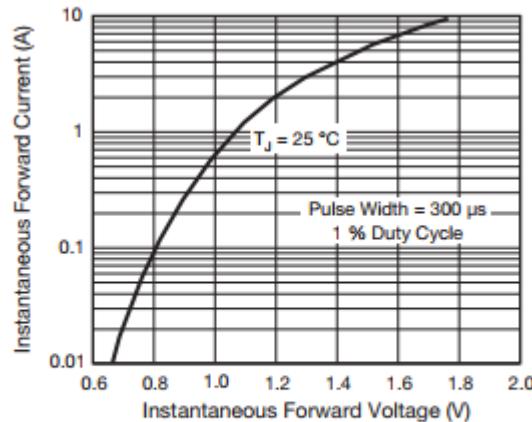


Fig. 4 - Typical Instantaneous Forward Characteristics

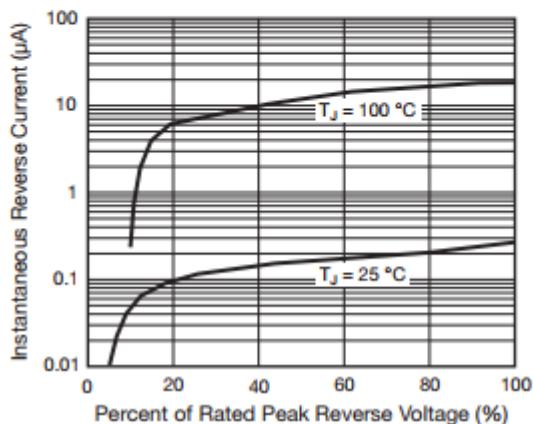


Fig. 5 - Typical Reverse Characteristics

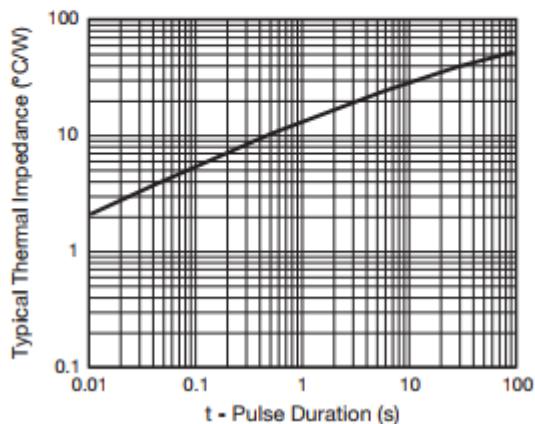


Fig. 7 - Typical Transient Thermal Impedance


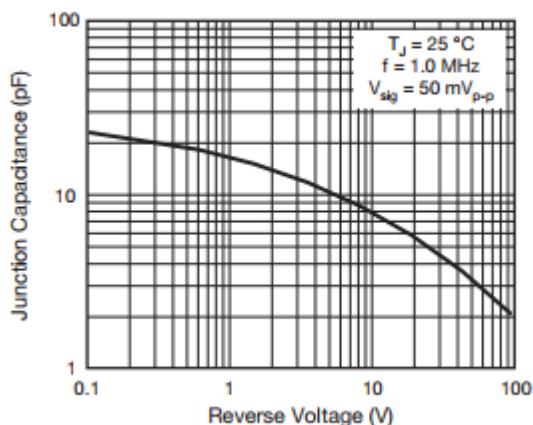


Fig. 6 - Typical Junction Capacitance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AL (DO-41)

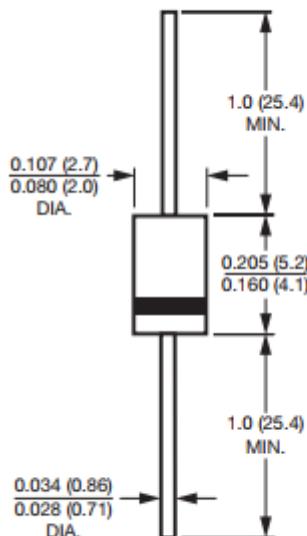

Note

- Lead diameter is $\frac{0.026 \text{ (0.66)}}{0.023 \text{ (0.58)}}$ for suffix "E" part numbers