


PTN Non-Insulated Pin type Copper Terminal / Connector

Standard design, Pin type,
 Conductor Size: 0.5 ~ 6 mm²
 OEM is welcome.

Material: Copper, Tinned
 Thickness of Copper: 0.75 mm

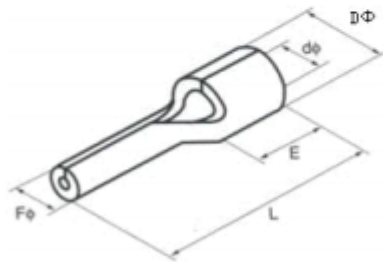

ITEM NO	Dimension				
	Fφ	L	E	Dφ	dφ
Size of Cable: 0.5 - 1.5 mm ² (A.W.G 22 - 16)			Max. Current: I _{max} = 19A		
PTN 1.25 - 9	1.9	13.8	4.8	3.4	1.7
PTN 1.25 - 10	1.9	14.8			
PTN 1.25 - 12	1.9	16.8			
PTN 1.25 - 13	1.9	17.8			
PTN 1.25 - 18	1.9	22.8			
Size of Cable: 1.5 - 2.5 mm ² (A.W.G 16 - 14)			Max. Current: I _{max} = 27A		
PTN 2 - 9	1.9	13.8	4.8	4.1	2.3
PTN 2 - 10	1.9	14.8			
PTN 2 - 12	1.9	16.8			
PTN 2 - 13	1.9	17.8			
PTN 2 - 18	1.9	22.8			
Size of Cable: 4 - 6 mm ² (A.W.G 12 - 10)			Max. Current: I _{max} = 48A		
PTN 5.5 - 10	2.8	16.8	6.8	5.0	3.0
PTN 5.5 - 13	2.8	19.8	6.8	5.6	3.4
PTN 5.5 - 18	2.8	24.8			