

Miniature Rocker Switch

Miniature Illuminated Rocker Switch

MRS Series

MIRS Series

Ordering Information

MRS-102A-2C7-R/B

- 基座颜色 Base color
- 盖帽颜色 Cap color
- 盖帽标记 Cap marking
- 产品序号 Product order
- 规格 Rating
- 电路特性 Circuitry trait
- 刀数 Poles
- 小型带灯波动开关 Miniature Illuminated Rocker Switch
- 小型波动开关 Miniature Rocker Switch

Specification

- 1.规格 Rating: ()6A 125VAC;3A 250VAC
(A)10A 125VAC;6A 250VAC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

电路特性 Circuitry trait

01	ON	-	OFF
02	ON	-	ON
11	(ON)		OFF
12	ON	-	(ON)
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

():回弹指示 Indicates Momentary


盖帽颜色 Cap color

黑 Black	(B)
白 White	(W)
红 Red	(R)
黄 Yellow	(Y)
绿 Green	(G)
蓝 Blue	(BL)
桔黄 Orange	(O)
灰 Gray	(GR)

基座颜色 Base color

黑 Black	(B)
白 White	(W)
灰 Gray	(GR)

盖帽标记 Cap marking

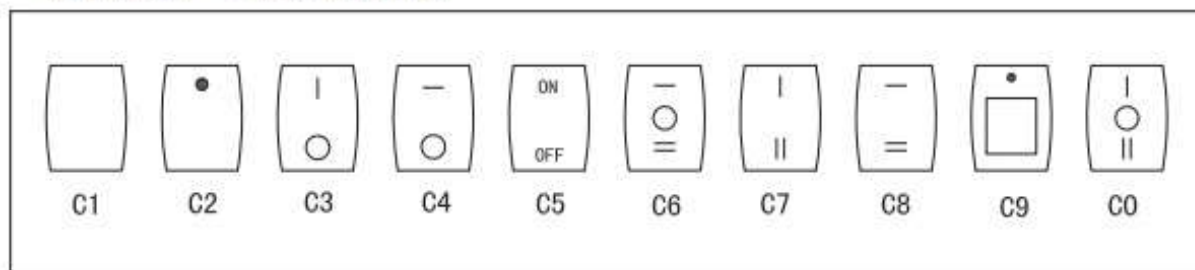

Water proof cap

